

PRATT CORROSIVE SUBSTANCE STORAGE CABINET: METAL - 30L - 1 DOOR - 1 SHELF

PRATT INDOOR CORROSIVE SUBSTANCE STORAGE CABINETS COMPLY WITH AS3780 "THE STORAGE AND HANDLING OF CORROSIVE SUBSTANCES".

This range of cabinets is for the storage of Corrosive Substances in liquid or solid as classified by the United Nations criteria and the ADG Code for Dangerous Goods. These include chemicals such as: Acids, Alkalis, Caustics, Sodium Hydroxide Solution, Hypochlorite Solution etc.


FEATURES & BENEFITS:

- Low profile under bench design.
- Constructed of double walled 1.2mm thick galvanised steel.
- Self closing door with speed adjustable hydraulic closure.
- 1 x 1.6mm thick, perforated, galvanised steel shelf.
- Continual stainless steel piano type door hinge.
- Overlapping door edging to prevent ingress of heat.
- Adjustable shelf heights at 45mm increments.
- Each shelf is supplied with a plastic spill tray.
- 2 x 50mm vent bungs with steel caps.
- Each vent incorporates steel flash arrester.
- 3 point self latching door mechanism.
- Recessed handle with keyed alike lock with 2 keys.
- External static earth connection and 1 x earthing wire.
- Additional powder coating of the shelving and closing assembly for added protection.
- 150mm deep liquid tight sump.
- Palletised and packaged with strong cardboard for protection.
- Corrosive diamond and other decals applied.
- Optional additional shelves available.
- Includes set of 4 rubber feet.
- Internal opening latch as required by Standards.

- **WEIGHT:** 53kg
- **CAPACITY:** 30L
- **DOORS:** 1
- **SHELVES:** 1 (Inc. Base Level)
- **EXTRA SHELF:** 5517PH-29S
- **EXTRA TRAY:** 5517-29TS

EXTERNAL (MM)			INTERNAL (MM)		
HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH
770	515	465	525	420	370

- NOTE:
1. INTERNAL HEIGHT IS TAKEN FROM THE TOP OF THE SUMP SILL/BOTTOM SHELF TO THE CEILING.
 2. FOR TOTAL EXTERNAL WIDTH MEASUREMENT, ADD 6MM PER VENT BUNG FOR TIGHT CLEARANCE LOCATIONS.
 3. AS 3780 SPECIFIES A MAXIMUM OF 50KG OR L FOR PACKAGING GROUP I CORROSIVE SUBSTANCES & 250KG OR L FOR PACKAGING GROUP II.
 4. CABINETS ARE DESIGNED FOR THE SAFE STORAGE OF CORROSIVES IN SEALED & CLOSED CONTAINERS.

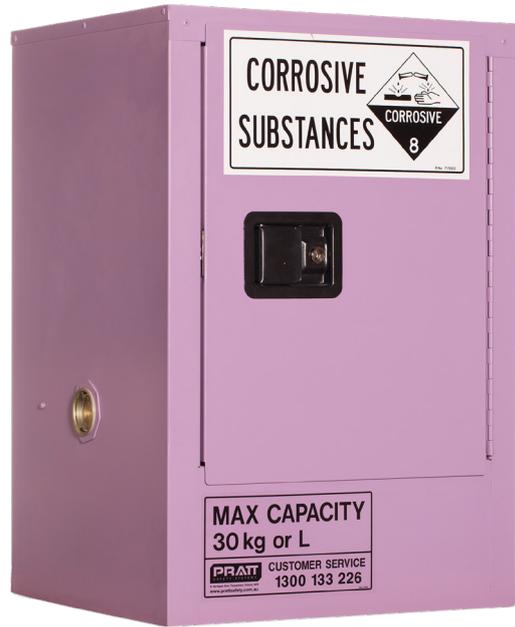

VOLUME CAPACITY	PER SHELF	TOTAL
2L Winchester	6	6
4L Winchester	4	4
4L Round Can	4	4
20L Round Can	1	1